

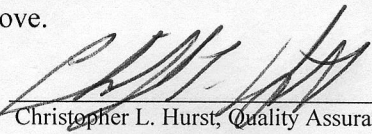


MATS FOR PROFESSIONAL USE

Certificate of Compliance ASTM D178-01 Type II, Class 2

| TEST | SPECIFICATIONS | RESULTS |
|--|--|-----------------|
| ELECTRICAL PROOF TEST ASTM D178 | MIN. 20,000V FOR 1MINUTE | PASS |
| DIELECTRIC BREAKDOWN TEST ASTM D149 | MIN. 30,000V | PASS |
| O ₃ RESISTANCE TEST METHOD B ASTM D178 | ANY VISUAL DEGRADATION | PASS |
| TENSILE STRENGTH ASTM D412 DIE C | MIN. 700PSI | 1318 PSI |
| ELONGATION ASTM D412 DIE C | MIN. 250% | 317% |
| TENSION SET ASTM D412 DIE B | MAX. 0.50IN. | 0.4827 IN |
| MOISTURE ABSORPTION ASTM D570 | MAX INCREASE 3% | 0.09% |
| ACCELERATED AGING ASTM D573 | MIN. 50% OF ORIGINAL TENSILE STRENGTH | 1363 PSI (103%) |
| FLAME RESISTANCE ASTM D178 APPENDIX | MAX. 0.5IN./12.7mm AFTER 30S | 0.12 mm/s |
| OIL RESISTANCE ASTM D471 | MAX. VOLUME INCREASE 4% | -0.04% |

I certify that these are the nominal results for Production testing of the ASTM D178-01 specification as outlined above.

Written by: 
Christopher L. Hurst, Quality Assurance and Support

Date: 1/14/10