


Justrite Safety Group






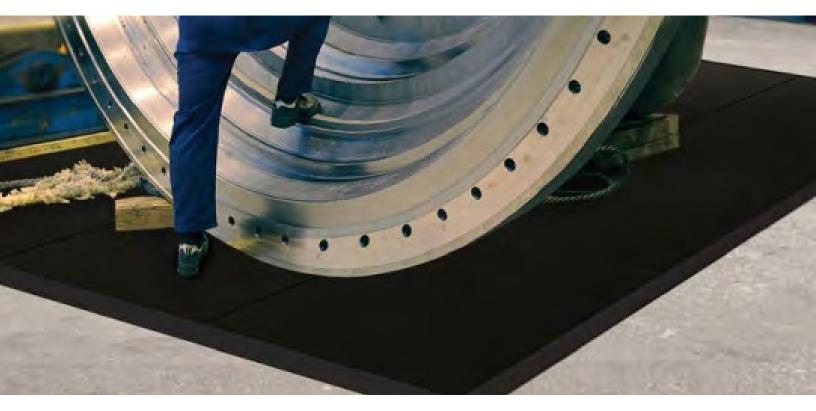

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- All products are manufactured in ISO certified facilities
- Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries

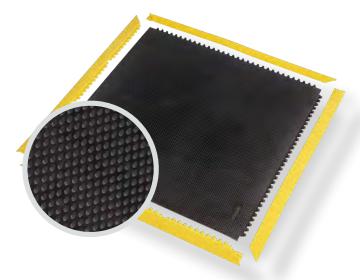

PRODUCT INFO

040 - SLABMATTM is a durable product designed for dry areas where heavy industrial equipment is stored. It is also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables. This indestructible rubber mat absorbs shock from falling objects and protects floors as well as equipment. The textured top surface provides traction and limits slip hazards. These interlocking mats allow on-site customization. Units of 3ft x 3ft tiles can be easily laid out from wall to wall or as islands, in any shape or direction. If it is necessary to add beveling be sure to allow outside and inside corners.

Material: Natural Rubber

Features and Benefits:

- Tough natural rubber compound
- Modular interlocking, designed for use with heavy industrial equipment
- Shock absorbing, impact protection
- Compression test at 20% up to 24,000 lb/sf



MODEL: 040

041- SLABMAT™ SAFETY RAMPS



SPECIFICATIONS

PPLICATIONS Heavy Industrial Areas Gyms

Weight Rooms

Ī	Performance	:	Good	Better	Best	Superior
	Colors	Black				
	Thickness	1/2"				
	Stock Sizes	3'x3'				

Wear Resistance Anti-fatigue Performance Slip Resistance







System





Protection





TESTING DATA

Test	Test Description	Results	
ASTM D575	Compression Deflection US	@ 25% 33.3 lb/in2 @ 50% 33.3 lb/in2	
ASTM D3884-01	Abrasion Resistance	5000 cycles 2.90 gr weight loss	
ASTM C1028-96	Static Coefficient of Friction	0.68	
ASTM D412	Elongation	165.7%	
Tear Strength ASTM D1004	Graves Tear Strength	55.4 lb	
Hardness ASTM D2240	Surface Flammability/Carpets and Rugs The hardness of a test sample is measured by means of a type A Shore Durometer. The Durometer measures the penetration of its specified indentor forced into the test material under specified conditions	67 Shore A	
DIN 51130	Anti-Slip	R9	
ASTM D2859	Flammability Test	Pass	

^{*}Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com





Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.