




Justrite Safety Group


125 - EVERGREEN DIAMOND™
PRODUCT INFORMATION BROCHURE



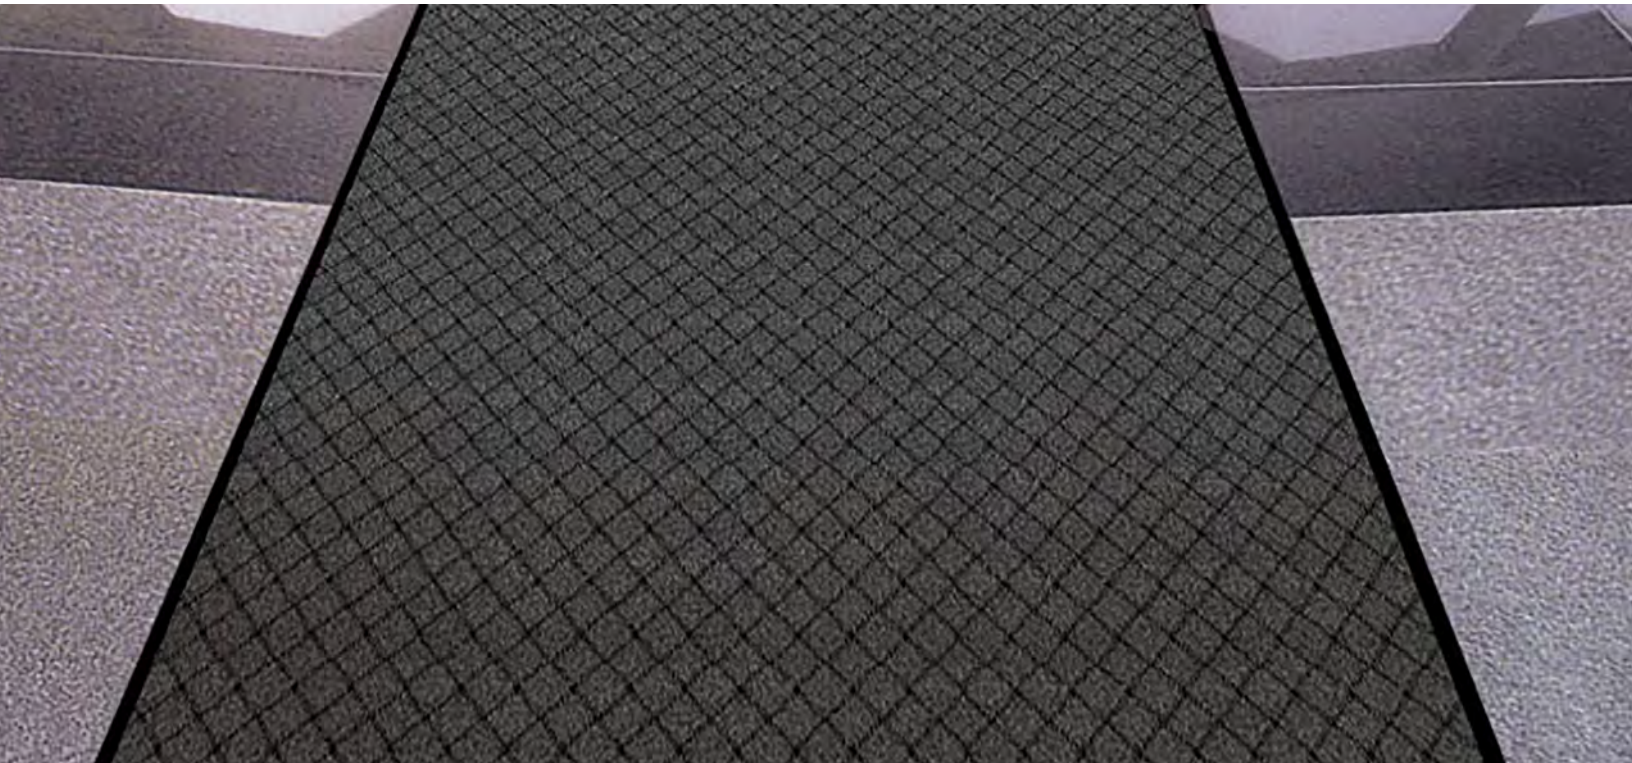

For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

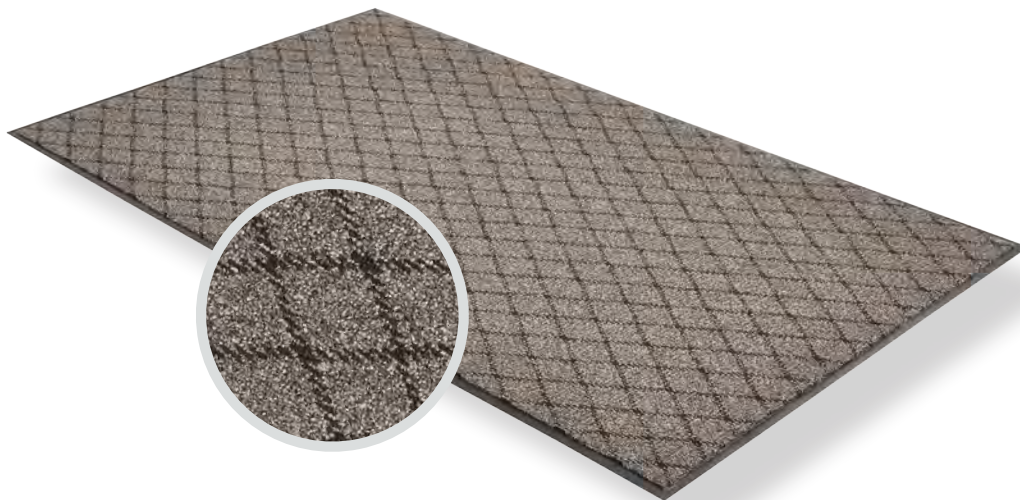


125 - EVERGREEN DIAMOND™ features a fashionable diamond pattern design made from 100% recycled carpet fibers. A hefty 25 ounce per square yard tufted loop pile top surface allows the mat to capture debris and moisture while maintaining its attractive appearance. A heavy-weight vinyl non-slip backing ensures minimum movement.

Material: Nylon Carpet W/Vinyl Backing

Features and Benefits:

- Drying mat
- Tufted loop pile construction for drying and cleaning
- Carpet fibers made from 100% recycled material
- 25 ounce tufted loop pile yarn per square yard
- Low profile performs in narrow clearance doorways
- Vinyl backing ensures minimal bucking and movement
- Recommended product as part of the GreenTRAX™ program for “Green Cleaning” environments

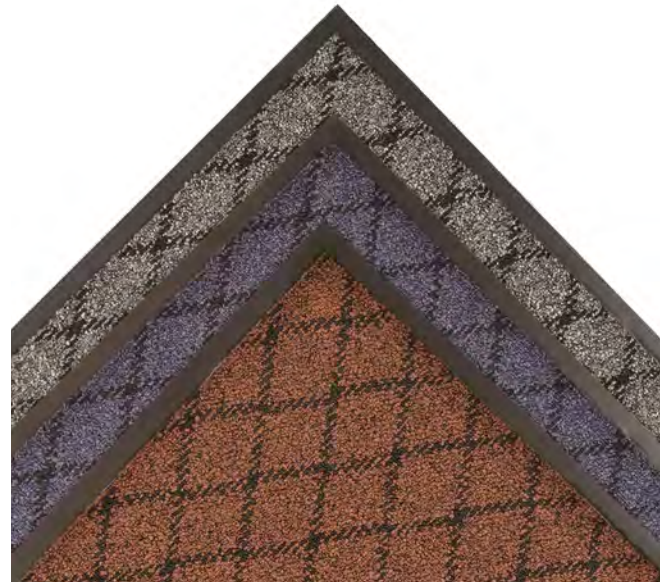




MODEL: 125

SPECIFICATIONS


APPLICATIONS

- Entranceways
- Lobbies
- Schools
- Medium Traffic Areas

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	 Charcoal  Brown  Blue

Performance:

	Good	Better	Best	Superior
Wear Retention	████████████████████			██████████
Crush Resistance	████████████████████			██████████
Soil Resistance	████████████████████			██████████
Function & Appearance	██			

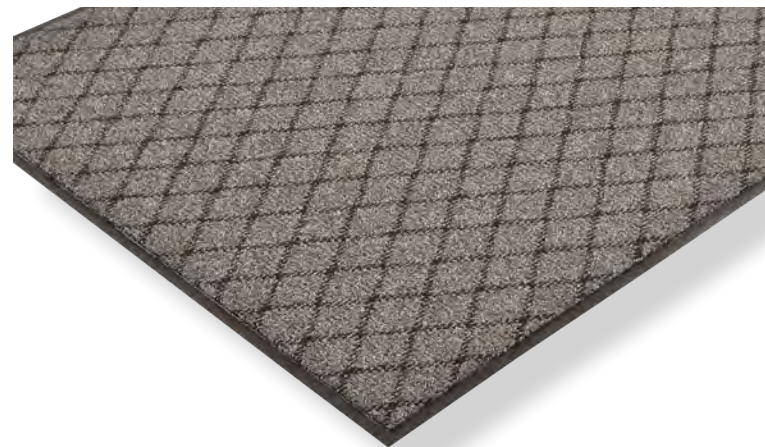

TESTING DATA

Test	Test Description	Results
ASTM 5252-98a	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 3.3 Color: 3.5
ASTM D3936-05	Delamination	Exceeds backing strength
ASTM D6540-05	Accelerated Soiling	Based on Visual Inspection 4.5 - Vacuum Rating 5.0 - Rating After Extraction
ASTM D412	Breaking Load/Elongation	219.2 lbs/in ²
ASTM D1894-08 (modified)	Static & Kinetic Coefficient of Friction	0.64
CPSA FF 1-70	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.