


Justrite Safety Group

138 - UPTOWNTM PRODUCT INFORMATION BROCHURE





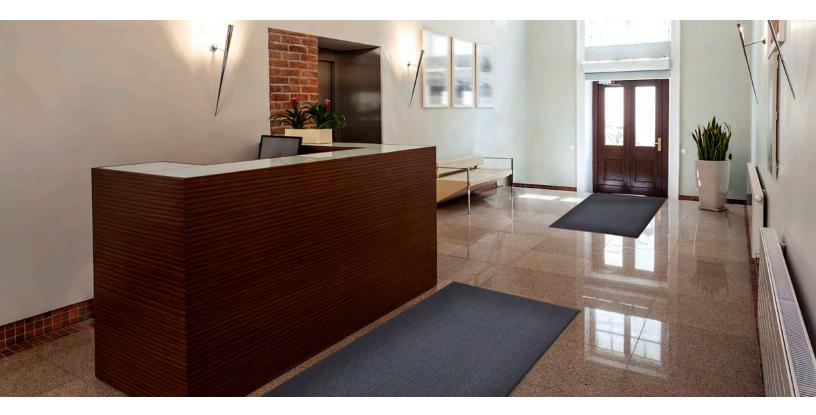

For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries
- All products are manufactured in ISO certified facilities



PRODUCT INFO

138 - UPTOWN™ is a high-low looped pile entrance mat that provides functionality for drying and retaining moisture and debris, while offering an upscale, elegant look. Its 36 ounces of tufted Decalon® yarn per square yard offer the ultimate in moisture absorption and crush resistance standing up to the heaviest traffic areas. Uptown[™] has a heavyweight vinyl backing to ensure minimum mat movement.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Drying mat
- The high/low looped pile design provides functionality for drying and retaining moisture and debris, while offering an upscale, elegant look
- A dense combination of scraping and absorbent yarns ensure maximum performance.
- 36 ounce of tufted loop pile yarn per square yard
- Low profile for use in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement
- Recommended product as part of the GreenTRAX™ program for "Green Cleaning" environments



MODEL: 138



SPECIFICATIONS

Stock Sizes	2′x3′, 3′x4′, 3′x5′, 3′x6′, 3′x10′, 4′x6′, 4′x8′				
Roll Sizes	3′x60′, 4′x60′, 6′x60′				
Thickness	3/8″				
Cut Lengths	3', 4', and 6' widths (up to 60' long)				
Colors					
	Brown		Navy	Charcoal	
Performance:		Good	Better	Best	Superior
Wear Retention					
Crush Resistance					
Soil Resistance					
Function & Appearance					



TESTING DATA

Test	Test Description	Results	
ASTM D6540	Accelerated Soiling Method	Rating After Vacuum 4.0 Rating After Extraction 5.0	
ASTM D412	Breaking Load/Elongation	346.8 lbs/in2	
ASTM 5252-98a	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 3.0 Color: 3.5	
ASTM D3936-05	Delamination	Exceeds Backing Strength	
CPSC FF 1-70 (ASTM D-2859)	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass	
-	Water Retention	Weight Gain = 291.08% (0.992 gals./yd2)	
ASTM D2240-02	Durometer Hardness	70	
ASTM D1335-05	Tuft Bind of Pile Yarn	10.4 = Superior	

*Testing performed by an independent test laboratory.

NOTRAX[®] 5655 West 73rd Street Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com





Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.