

Justrite Safety Group








For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- All products are manufactured in ISO certified facilities
- Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries

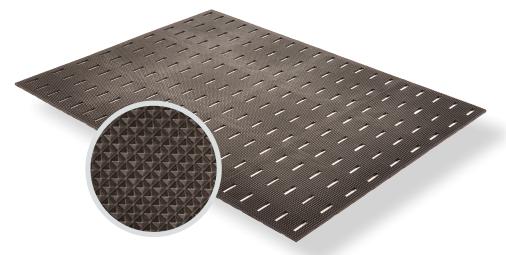


420 - CUSHION-DEK™ is made from a tough vinyl compound molded wih a raised pyramid design to enhance traction. Slotted perforations allow for moisture to drain from the worker platform in wet environments. A studded bottom surface raises the mat and allows for channeling of moisture.

Material: PVC

Features and Benefits:

- Tough PVC compound molded with a raised pyramid design to enhance traction
- Made from 100% recycled PVC
- Drainage system for use in wet areas
- Slotted perforations (1/2" wide by 1-7/8" long) allow for moisture to escape worker platform
- Studded bottom surface raises mat and allows for channeling of moisture and continuous aeration

WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov



MODEL:420

PPLICATIONS

- Elevated Runs
- Locker Rooms
- Shower Areas
- Assembly Lines

SPECIFICATIONS

Stock Sizes	2'x3', 2'x6', 3'x4', 3'x10', 4'x6', 4'x8'
Roll Sizes	2'x30', 3'x30', 4'x30'
Thickness	7/16"
Cut Lengths	2′, 3′ and 4′ widths (up to 30′ long
Colors	Black

Performance: Wear Resistance Anti-fatigue Performance Slip Resistance

















Floor Protection

Cut Lengths Anti-Fatigue Anti-Slip

Oil/Grease Resistant

Grease Drainag

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	(420) .093" (40 lbs/sq. inch) (422) .654" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	(420) .70 (422) .67
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	(420) 2.29 Grams (422) 2.33 Grams
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in % of size increase at breaking point.	N/A
Critical Radiant Flux ASTM E648-94A	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	(420) .41 watts/square cm

^{*}Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com







Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.