




Justrite Safety Group

# 504 - BEVELED DRAIN-STEP™


PRODUCT INFORMATION BROCHURE



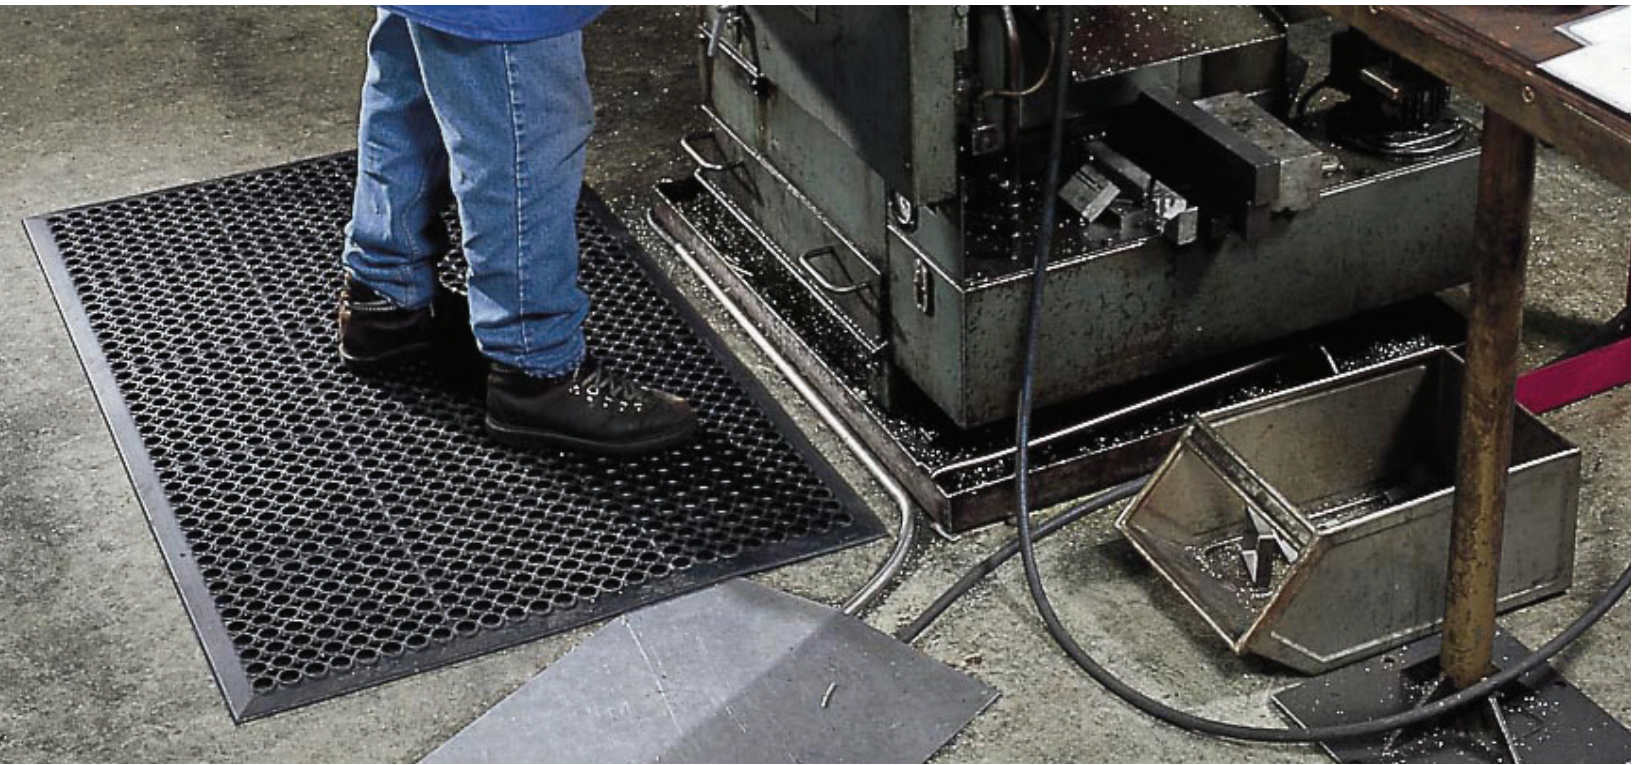

For over 70 years, the name Notrax<sup>®</sup> has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax<sup>®</sup> offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax<sup>®</sup> offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

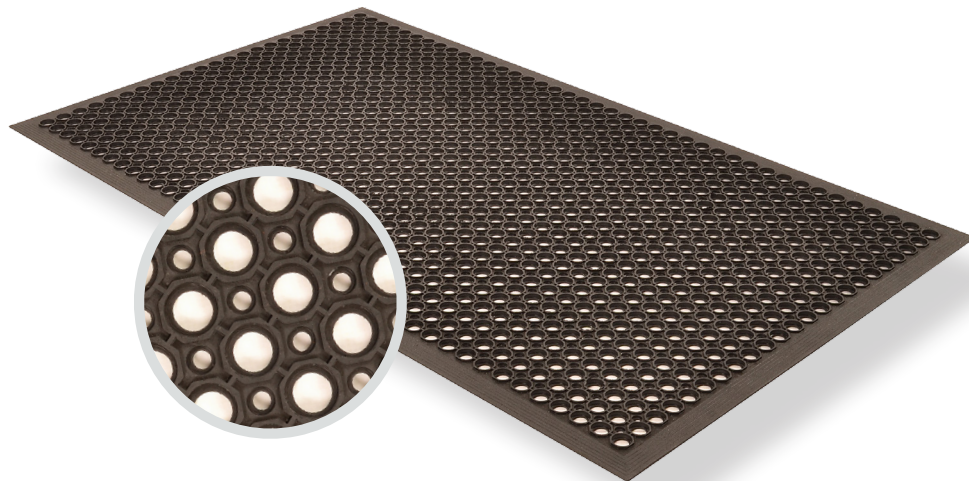


**504 - BEVELED DRAIN-STEP™** is designed for wet workstation environments that require basic fatigue relief. A large and small hole drainage system channels liquid and debris away from the work area. Molded in beveled edges on all four sides eliminates trip hazards

**Material:** General Purpose Rubber

**Features and Benefits:**

- Economic general purpose black rubber compound
- Large hole drainage design keeps liquids and debris away from worker platform
- Beveled edges on all 4 sides

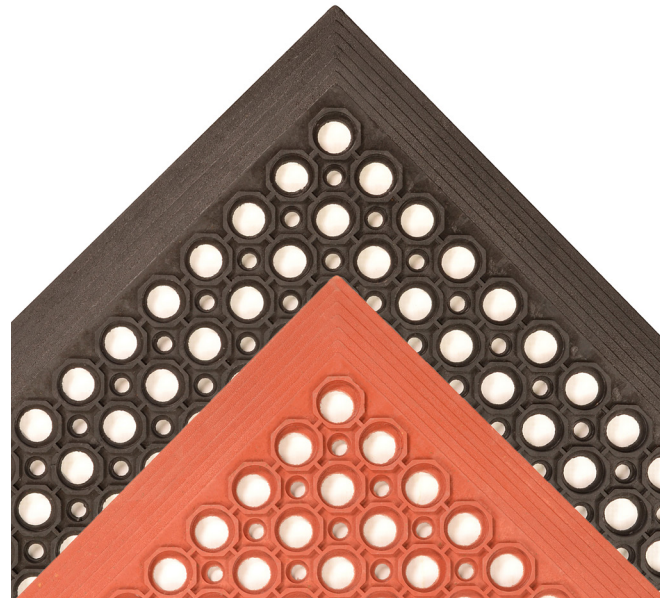



MODEL: 504



## SPECIFICATIONS


**APPLICATIONS**

- Wet Workstations
- Assembly Lines
- Packaging Areas
- Service Counters

Stock Sizes	3'x5'	
Thickness	1/2"	
Colors	 Black	 Red

**Performance:**

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

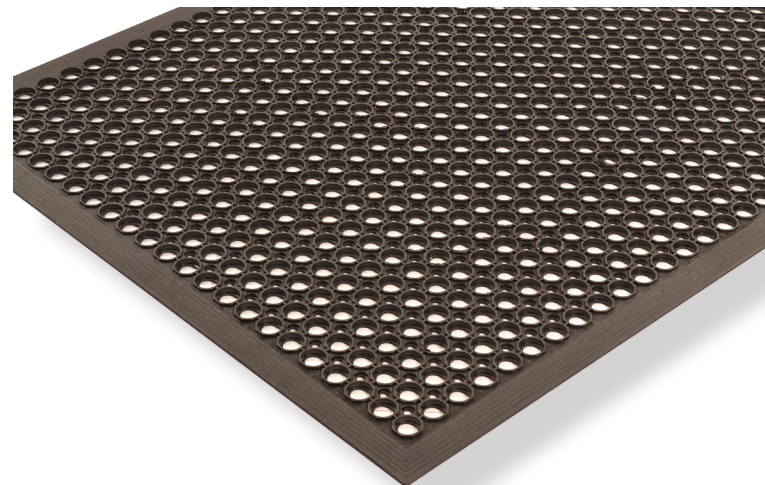

# TESTING DATA

Test	Test Description	Results
ASTM C1028-96	Static Coefficient of Friction	Dry 0.68 Wet 0.66
ASTM D395	Compression Set	@25% / 1.70%
ASTM D3884-01	Abrasion Resistance (Results measured in weight loss - %)	@ 1,000 cycles (1.47%)
ASTM D1171	Method A Ozone	No Noticeable Effect
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

\*Testing performed by an independent test laboratory.

## NOTRAX®


5655 West 73rd Street  
Chicago, IL 60638

**PHONE:** (800) 621-2802

**FAX:** (800) 322-7105

**EMAIL:** saleschicago@checkers-safety.com

www.notrax.com

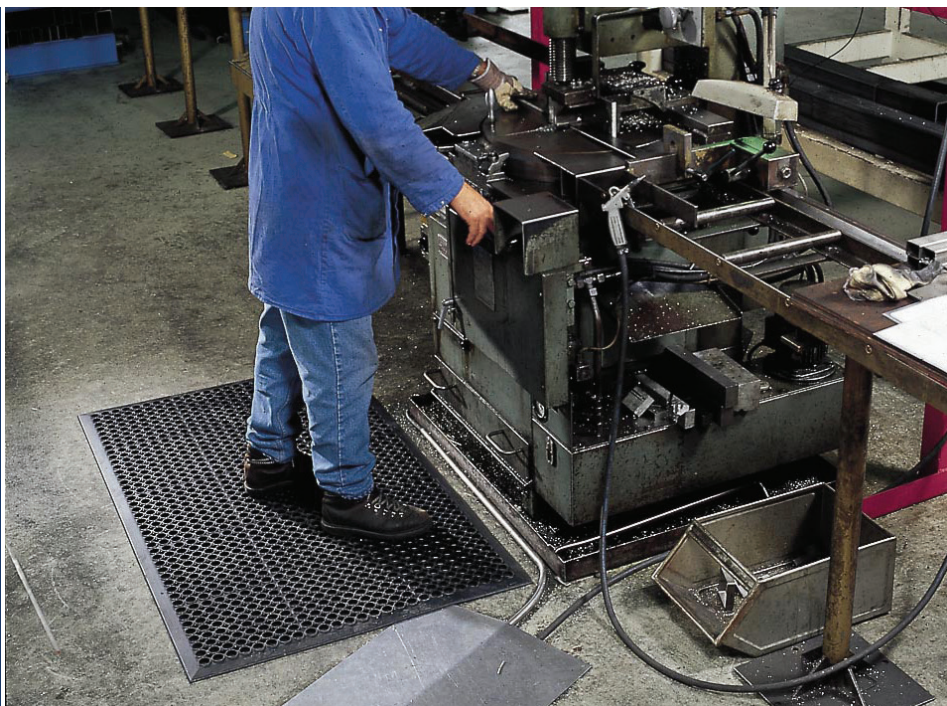

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.