



Justrite Safety Group


**544 - COMFORT ZONE™**  
PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax<sup>®</sup> has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax<sup>®</sup> offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax<sup>®</sup> offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

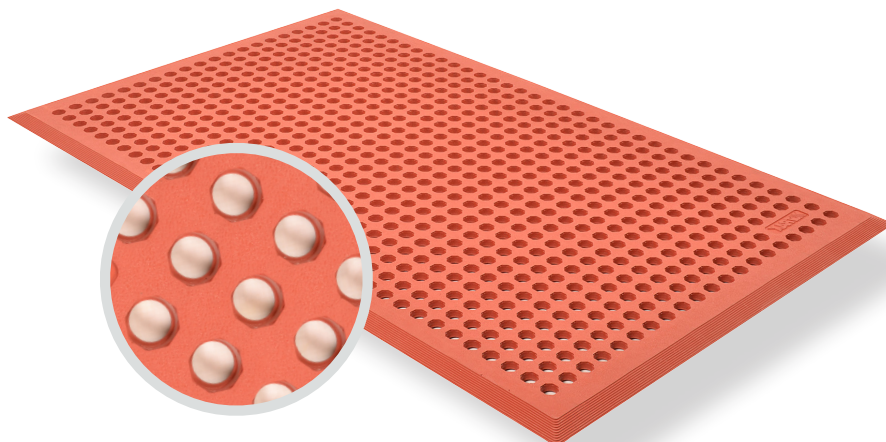


**544 - COMFORT ZONE™** is made from a solid rubber compound featuring a large hole drainage system and a textured top surface that facilitates drainage and minimizes slippage. Broad beveled borders on all four sides are molded directly into the mat reducing trip hazards and making it the perfect choice for applications where workers are moving on and off the mat frequently.

**Material:** Rubber

**Features and Benefits:**



- Textured top surface to minimize slippage
- Large drainage holes remove liquid and debris from worker platform
- Available in general purpose rubber (black) and 100% Nitrile grease resistant (red)
- Molded-in beveled edges

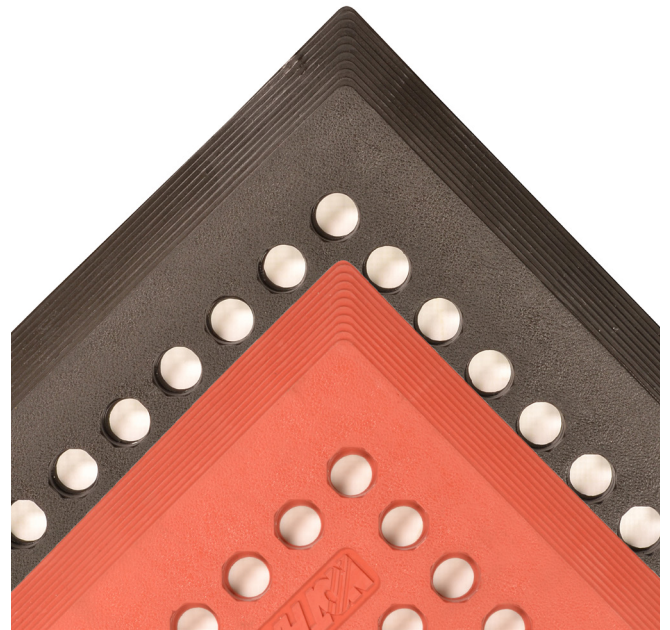**⚠ WARNING:** This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



MODEL: 544


## SPECIFICATIONS

Stock Sizes	3'x5'	
Thickness	5/8"	
Colors	 Red	 Black

Performance:	Good	Better	Best	Superior
Grease Resistance		Black	Red	
Comfort				
Wearability				
Slip Resistance				

**APPLICATIONS**

- Workstation environments, exposure to grease, oils & water, drainage and comfort, heavy-duty

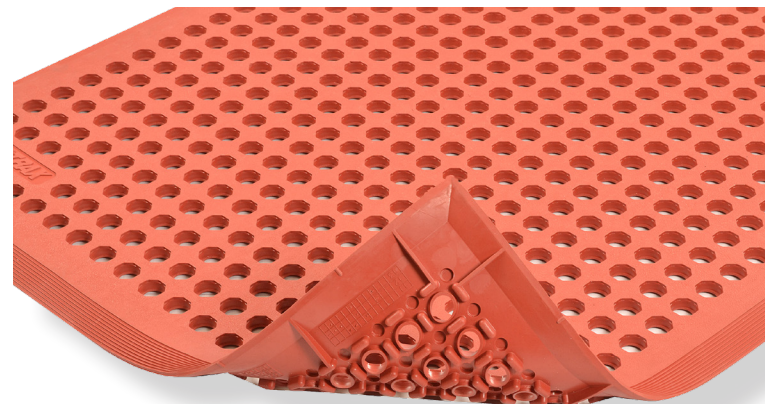

# TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.780" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.67
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	227.7% (average of 5 specimens)
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	52

\*Testing performed by an independent test laboratory.

## NOTRAX®

5655 West 73rd Street  
Chicago, IL 60638

**PHONE:** (800) 621-2802

**FAX:** (800) 322-7105

**EMAIL:** saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.