



Justrite Safety Group

545 - DIAMOND TOP INTERLOCK™


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

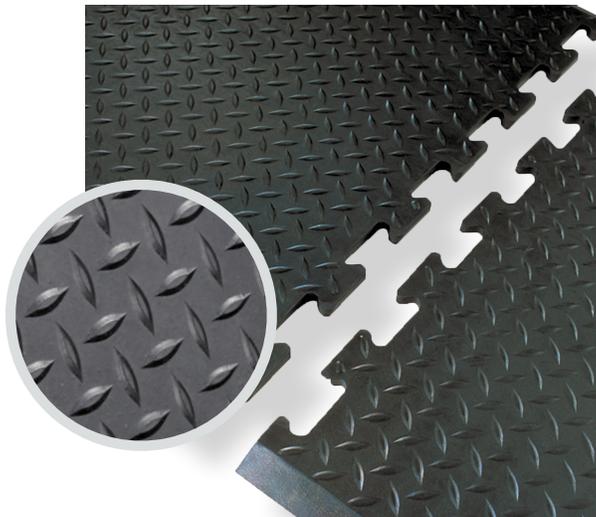


545 - DIAMOND TOP INTERLOCK™ features a rubber diamond plate top surface for traction, and a sturdy waffle support system on the underside for maximum comfort. Offered as a stand alone mat, or as an interlocking continuous length, this mat is perfect for assembly lines, welding areas, picking lines, and other heavy duty dry work areas. Diamond Top Interlock™ works well in wet or dry environments where long runs of anti-fatigue matting are needed.

Material: Rubber

Features and Benefits:

- Solid rubber construction
- Diamond-plate top surface pattern for added traction
- A sturdy waffle support system on the underside for maximum worker comfort
- Available in three versions:
 - "Single" mat with beveled borders on all 4 sides
 - "End" mat with interlocking teeth on one end
 - "Center" mat with interlocking teeth on both ends

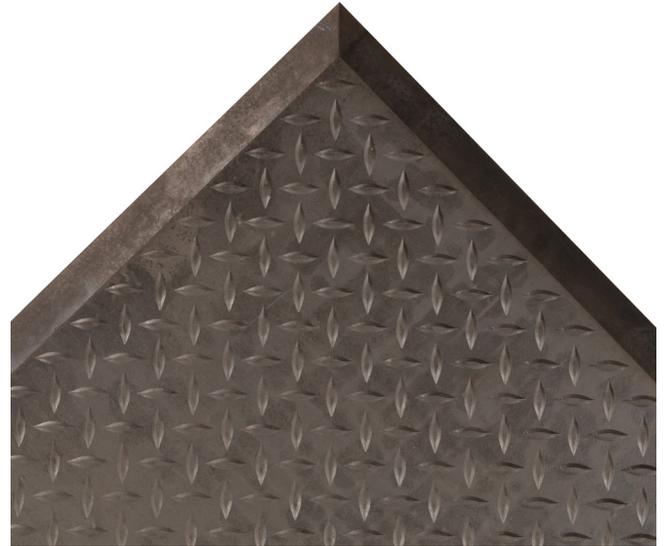

MODEL: 545


SPECIFICATIONS

Stock Sizes	28"x31", 36"x31"
Thickness	1/2"
Colors	 Black

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-Fatigue Performance				
Slip Resistance				

APPLICATIONS

- Assembly Lines
- Welding Areas
- Picking Lines
- Heavy Duty Areas

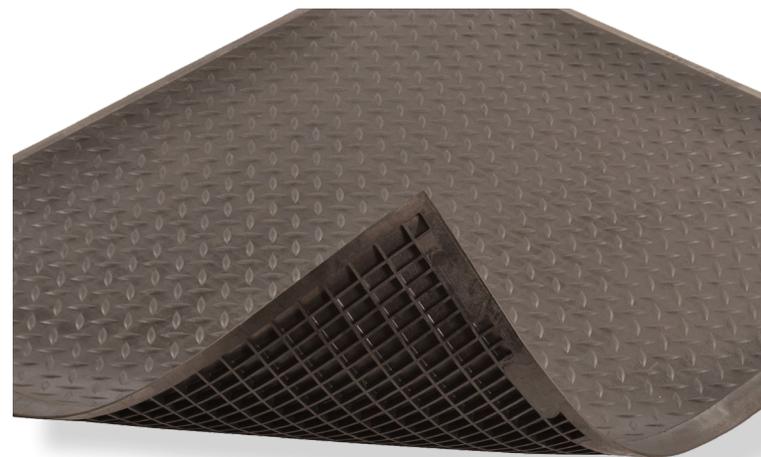

Modular System



Cleaning



Anti-Fatigue



Anti-Slip



Insulation

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.108" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.80
Critical Radiant Flux ASTM E648-94A	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	.51 watts/square cm Good Better Best Superior Welding fatigue welding Anti-Fatigue floor

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.