



Justrite Safety Group


**730 - V-GROOVE CORRUGATED
RUNNER™ - VINYL**
PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

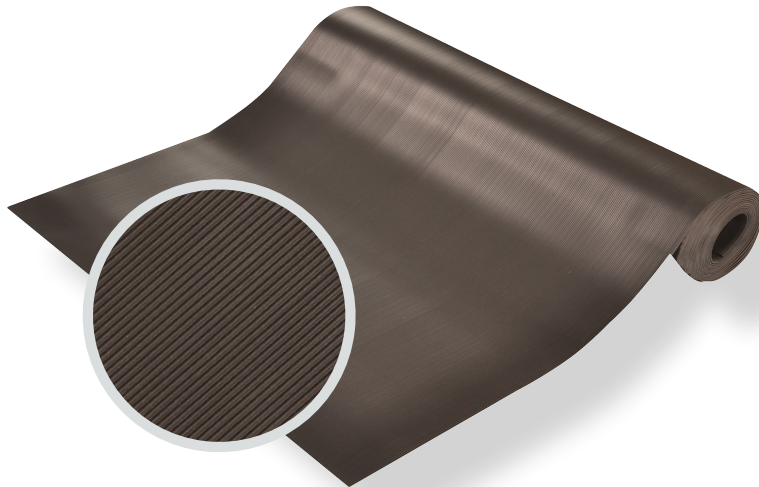

730 - V-GROOVE CORRUGATED RUNNER™ - VINYL is made from a durable vinyl compound that features a rib-tooth design to improve traction. The vinyl runner protects floors, creates a barrier to cold flooring substrates, and has a silencing effect over noisy tile. The low profile matting allows for easy on/off cart traffic and can also be used as a liner for maintenance and tool carts.

Material: Vinyl

Features and Benefits:

- Corrugated rib-tooth design improves traction
- Insulates floor and creates a silencing effect
- Low profile allows for easy on/off cart traffic
- Utilizes a vinyl compound
- Made from 100% recycled materials

⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov



MODEL: 730


SPECIFICATIONS

Roll Sizes	2'x105', 3'x105', 4'x105'
Thickness	1/8"
Cut Lengths	2', 3', and 4' widths (up to 105' long)
Colors	 Black

- APPLICATIONS**
- Aisle Ways
 - Warehouses
 - Vending Areas
 - Cart Traffic

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

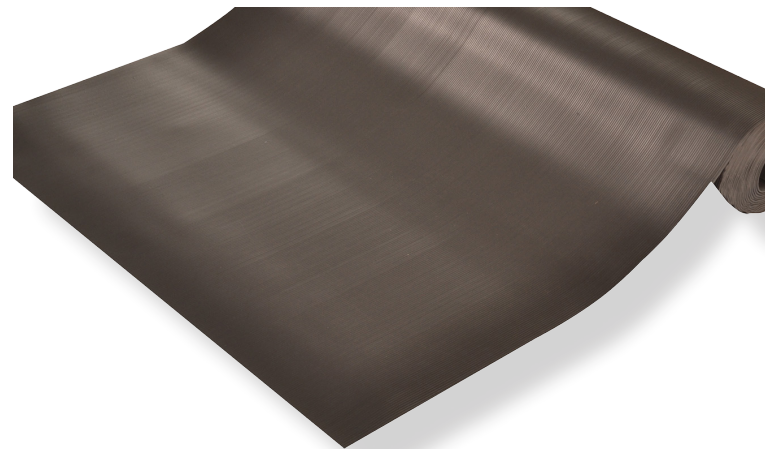


 Anti-Slip


 Cut Lengths


 Floor Protection


 Insulation

TESTING DATA

Test	Test Description	Results
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.73
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	5.66 Grams
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	150%
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	88

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.