



Justrite Safety Group

742 - BUBBLE TOP RUNNER


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

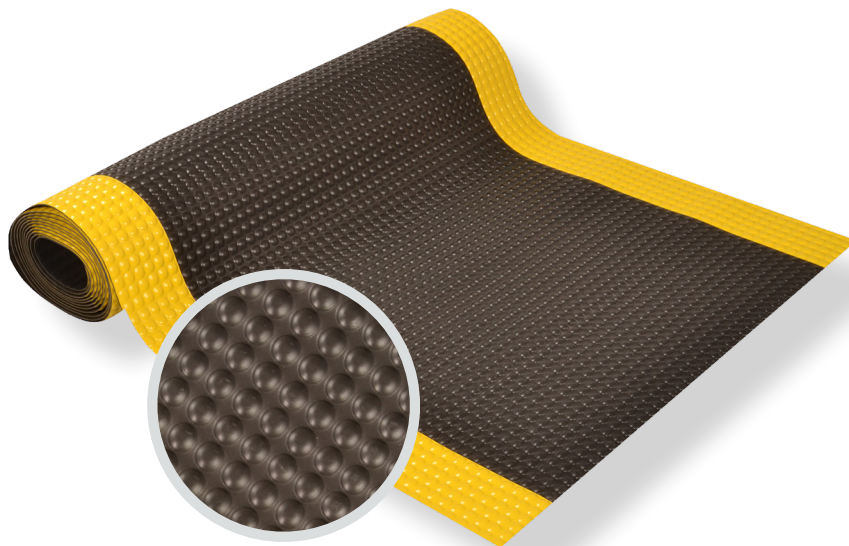


742 - BUBBLE TOP RUNNER is made from a durable heavy-duty vinyl compound. The bubble-top design offers added traction and ergonomic support in dry work areas. Bubble-Top Runner provides floor protection and a barrier to cold floors.

Material: Vinyl

Features and Benefits:

- Long-lasting vinyl top surface
- Bubble top surface texture provides added cushioning comfort
- Provides barrier to cold floors
- Low profile to eliminate trip hazards

⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

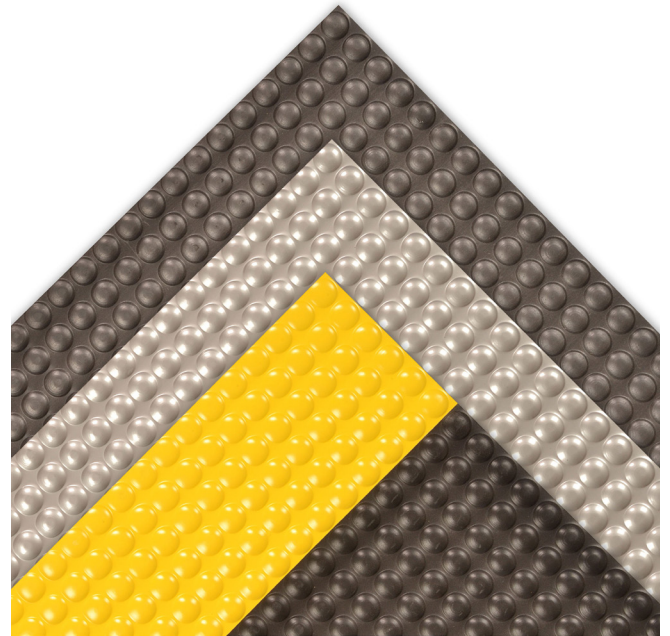




MODEL: 742

SPECIFICATIONS


APPLICATIONS

- Aisle Ways
- Warehouses
- Vending Areas
- Cart Traffic

Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'		
Thickness	3/16"		
Cut Lengths	2', 3', 4' and 5' widths (up to 75' long)		
Colors	 Black	 Black/Yellow	 Grey

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-Fatigue Performance				
Slip Resistance				

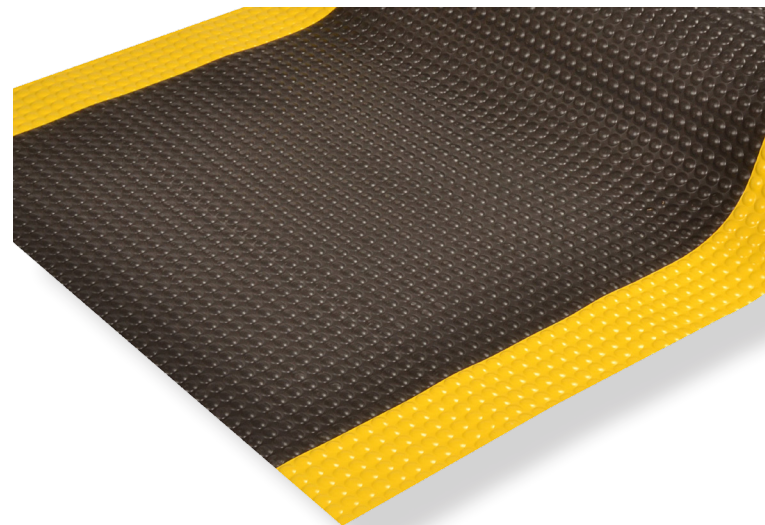

Anti-Slip



Cut Lengths



Floor Protection



Insulation

TESTING DATA

Test	Test Description	Results
ASTM D792	Density and Specific Gravity	1.45 - 1.55
ASTM D412 DIE C	Tensile Strength	800 PSI
ASTM D412 DIE C	Elongation	200%
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	75 - 85
FMVSS302	Flammability	Requirement ≤ 4 Sample Burn Rate = 0 Sample self Extinguished

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.