

Justrite Safety Group

765 - DEEP FREEZE MATTM PRODUCT INFORMATION BROCHURE







For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- All products are manufactured in ISO certified facilities
- Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries



PRODUCT INFO

765 - DEEP FREEZE MAT™ is the only rubber mat specifically formulated to perform in deep freeze environments. Tested to withstand temperatures to -40 degrees Fahrenheit, this antislip mat features a raised knob solid top surface to enhance traction, and is designed for use in meat lockers, walk-ins, and other specialty freezer applications. Manufactured with MicroStop® anti-microbial rubber compound.


Material: Rubber

Features and Benefits:

- Raised knob solid top surface that enhances traction
- Tested to withstand temperatures to -40 Fahrenheit
- MicroStop® anti-microbial rubber compound
- Low profile for easy cart traffic



WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is know to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov



MODEL: 765



SPECIFICATIONS

Stock Sizes	2'x5', 2'x8', 3'x5', 3'x8', 4'x5', 4'x8'				
Thickness	3/8″				
Cut Lengths	2′, 3′ and 4′ widths (up to 60′ long)				
Colors		Black			
Performance:		Good	Better	Best	Superior
Wear Resistance					
Anti-fatigue Performance					
Slip Resistance					1





TESTING DATA

Test	Test Description	Results	
ASTM D-395	Compression Set	@ 25%: 2.2%	
ASTM D-575	Compression Deflection	@ 25%: 21.1 lbs/in2 @ 50%: 75.1 lbs/in2	
ASTM D-1171	Ozone	No Cracking	
ASTM D-3884-01	Abrasion Resistance (weight loss)	@1,000 cycles: 0.78 grams (1.22%)	
ASTM D-1053-92a(01)e1	Low Temperature Torsional Stiffness	T2: -25.0° T5: -40.5° T10: -45.0° T100: -49.5°	
ASTM D-2859/CPSC FF-170	Surface Flammability/Carpets and Rugs	Pass	
ASTM D-2137-94 (Method A)	Low Temperature Brittleness	-37°C	
ASTM D-1329-02	Low Temperature Retraction	TR10: -45°C TR30: -39°C TR50: -33°C TR70: -23°C	

*Testing performed by an independent test laboratory.


NOTRAX® 5655 West 73rd Street Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com

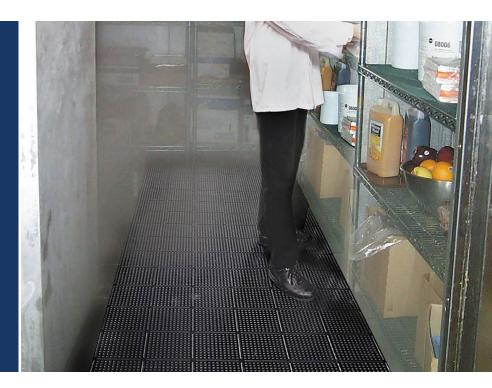



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.