



Justrite Safety Group

# 780 - PEBBLE TRAX® RUNNER


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax<sup>®</sup> has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax<sup>®</sup> offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax<sup>®</sup> offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

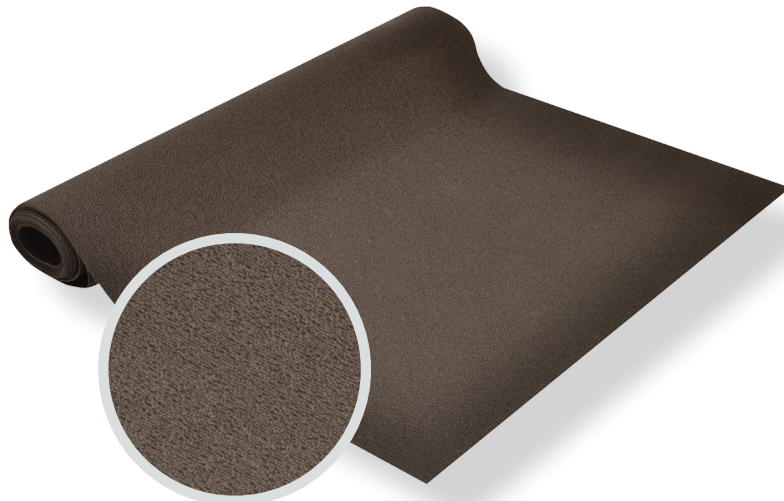

**780 - PEBBLE TRAX® RUNNER** is made with a resilient rubber compound and a pebble-embossed surface providing long-lasting traction and floor protection for a variety of industrial applications. This runner is the perfect product for long warehouse and store-room aisleways creating a barrier to cold floors.

**Material:** Rubber

**Features and Benefits:**

- Resilient rubber top surface
- Pebble-embossed surface texture provides added traction and is easy to sweep clean
- Provides barrier to cold floors
- Low profile to eliminate trip hazards



MODEL: 780

## SPECIFICATIONS

**APPLICATIONS**

- Aisle Ways
- Warehouses
- Vending Areas
- Cart Traffic

Roll Sizes	2'x75', 3'x 75', 4'x75'
Thickness	3/32"
Cut Lengths	2', 3' and 4' widths (up to 75' long)
Colors	 Black

**Performance:**

	Good	Better	Best	Superior
Wear Resistance	██████████		██████	██
Anti-Fatigue Performance	██████	██████	██████	██
Slip Resistance	██████████		██████	██



Anti-Slip



Cut Lengths



Floor Protection



Insulation

# TESTING DATA

Test	Test Description	Results
ASTM D297	Specific Gravity	1.63
ASTM D412	Tensile Strength	743 PSI
ASTM D412	Elongation	508%
ASTM D412	DIE C Tear	175 PPI
ASTM D2240	Hardness - (Shore A)	70
Fed. Test Std. 501 Method 4311	Tension Set	22%
ASTM D395	Compression Set, Method B	32%
FMVSS302	Flammability	Pass

\*Testing performed by an independent test laboratory.

## NOTRAX®


5655 West 73rd Street  
Chicago, IL 60638

**PHONE:** (800) 621-2802

**FAX:** (800) 322-7105

**EMAIL:** saleschicago@checkers-safety.com

[www.notrax.com](http://www.notrax.com)

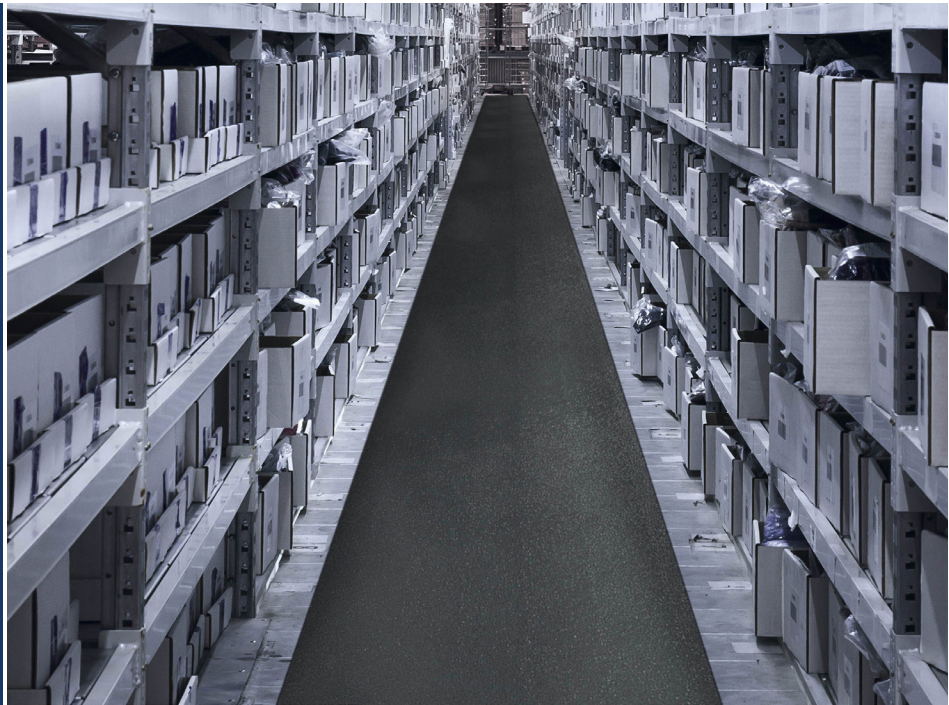

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at [Justrite.com](http://Justrite.com), [Checkers-safety.com](http://Checkers-safety.com), and [Notrax.com](http://Notrax.com).