



Justrite Safety Group

975 - CUSHION TRAX[®] ULTRA[™]


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

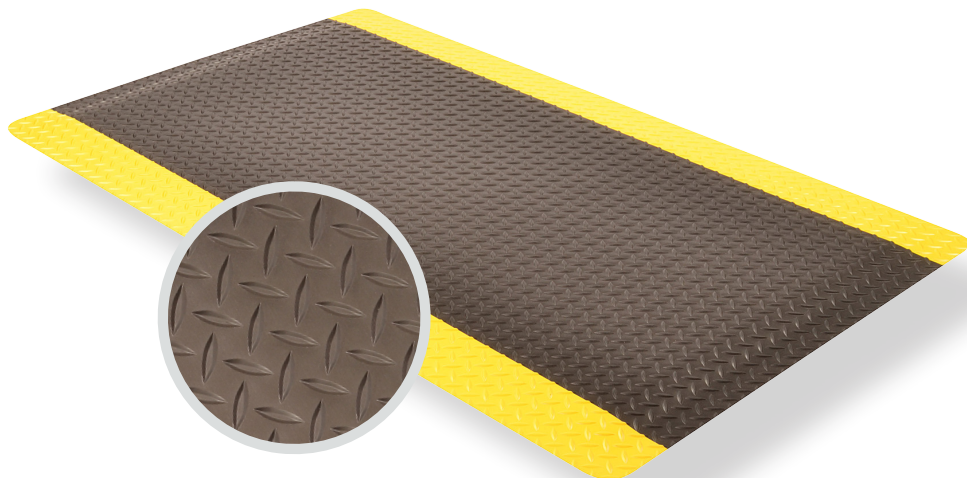

975 - CUSHION TRAX® ULTRA™ is the ultimate high performance anti-fatigue floor mat. Engineered to meet the toughest requirements of today's industrial applications and is particularly suited for multi-shift operations in dry work areas. The durable vinyl diamond-plate design provides non-directional traction, and is easy to clean. The top surface is combined with a dense closed cell foam base utilizing Notrax® exclusive UniFusion™ technology. This virtually eliminates the possibility of de-lamination. All Notrax® laminate floor mats come standard with RedStop™, a uniquely engineered non-slip backing technology that eliminates the slipping and sliding of floor mats on smooth surface flooring such as tile, wood, marble, and treated concrete.

Material: Vinyl Surface With Dense Closed PVC Foam Base




Features and Benefits:

- Long-lasting vinyl top surface made from 100% recycled materials is combined with a dense closed cell PVC foam base
- Diamond-plate surface texture provides added traction
- UniFusion™ bond guaranteed for the life of the mat
- Redstop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- Available spliced in widths wider than 5' up to 12' upon request




WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

SPECIFICATIONS

Stock Sizes	2'x3', 3'x5', 3'x12'		
Roll Sizes	2'x75', 3'x75', 4'x75', (5'x75' in BL & BY Only)		
Thickness	3/4"		
Cut Lengths	2', 3', 4' and (5' in BL & BY Only) widths (up to 75' long)		
Colors	 Black	 Black/Yellow	 Grey

Performance:


	Good	Better	Best	Superior
Wear Resistance	<div></div>			
Anti-fatigue Performance	<div></div>			
Slip Resistance	<div></div>			

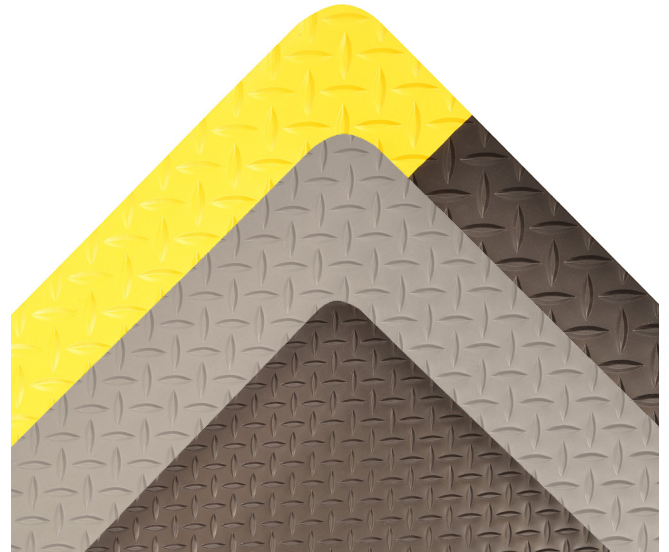

MODEL: 975

APPLICATIONS

- Work Stations
- Packaging Areas
- Assembly Lines
- Pick Pack Aisles

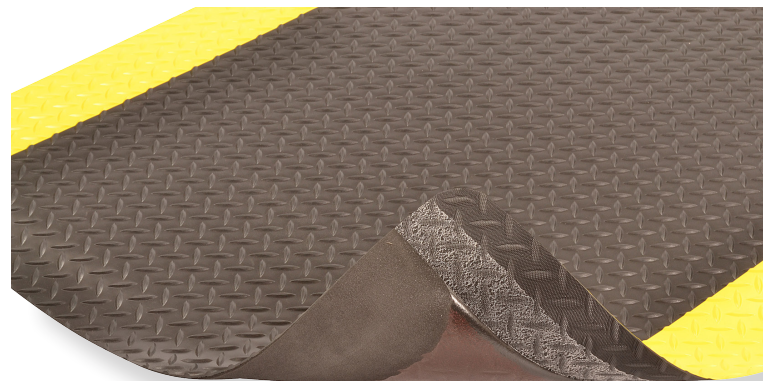

Anti-Fatigue



Anti-Slip



Cut Lengths



Insulation

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	@ 20 lbs/sq. in. 0.373 in. @ 40 lbs/sq. in. 0.436 in.
ASTM D-3574 Test H	ASTM D-3574 Test H (Measured in % rebound)	15%
ASTM D-3884-01	Abrasion Resistance (Measured in weight loss)	@ 500 cycles (-0.3%) @ 1000 cycles (-0.3%)
ASTM C-1028-96	Static Coefficient of Friction	Dry 0.630
ASTM D-2240-02	Durometer / Hardness	Shore A 85
ASTM D-1004-94a-03	Tear Resistance (Measured in lbs.)	54.6
Critical Radiant Flux	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	0.58 watts/sq. cm
CPSC FF 1-70 (ASTM D2859)	Flammability (Pass/fail)	Pass

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.